

# Product Specifications

## Category 6 MT-Series Unscreened Keystone Jacks

### KEY FEATURES

- Exceeds TIA-568-C.2 component performance specifications
- Supports TIA-568-C.2 category 6 100 meter channel performance
- Slim profile for the highest density applications
- Improved wire retention and ease of termination with rear 110 type contacts
- Easy-to-read T568A/B wiring scheme color-coded label
- Compatible with Signamax screened snap-in patch panels and work area faceplates
- Circuit identification icons, dust covers, and 110 protection caps included in kit



The Signamax Category 6 Unscreened MT-Series Keystone Jacks have been designed to meet the need for today's high-bandwidth applications. These connectors are slim in profile for the highest density applications and have the ability to mount either color-coded icons for service identification or dust covers to protect unused jacks from dust and other contaminants.

The contact design provides enhanced plug-to-jack connection integrity, protects against damage caused by insertion of 4- or 6-position plugs. Special design features allow these jacks to be terminated with a standard 110 single-position tool or with the Signamax four-pair tool, and are rated for a minimum of 750 plug insertions providing for the highest level of system reliability.

### ORDERING INFORMATION

PART NO.	DESCRIPTION
KJ458MT-C6C	Category 6 MT-Series Keystone Jack, T568A/B Wiring, Light Ivory
KJ458MT25-C6C	Category 6 MT-Series Keystone Jack, T568A/B Wiring, Light Ivory, 25-Pack

For other colors add the following to P/N: -WH -YE -OR -RD -BU -GN -GY -BK

### SPECIFICATIONS

#### TRANSMISSION PERFORMANCE

ANSI/TIA-568-C.2: meets or exceeds category 6 (1–250 MHz) component specifications

#### TRANSMISSION MEDIA

Unscreened twisted pair (U/UTP)

#### JACK TYPE

8p8c (8-position, 8-contact) "RJ45" style

#### WIRING SCHEME (See Figure 1)

ANSI/TIA-568-C.2: T568A & T568B  
 ISO/IEC 11801 2<sup>nd</sup> Ed.: 8-position pin/pair assignment (1-2/3-6/4-5/7-8)

#### WIRE GAUGE

22 to 24 AWG (0.644 to 0.511 mm)

#### ELECTRICAL

**Insulation Resistance:** Min 500 MOhm @ 100 V<sub>dc</sub>

**Dielectric Withstanding Voltage:**

1,000 V<sub>ac</sub> peak contact-to-contact @ 60 Hz for 1 min

**Spring Wire Contact Resistance:** Max 20 mOhm

**IDC Contact Resistance:** Max 2.5 mOhm

**Current Rating:** See Figure 2

#### CONSTRUCTION

**Housing:** High impact thermoplastic, UL94V-0 fire retardant

**Jack Spring Wire:** Phosphor bronze alloy plated with 50 µin of gold over 70 to 100 µin of nickel

**IDC:** 110 type, phosphor bronze alloy with 100 µin 100% tin alloy

#### MECHANICAL

**Total Contact Force:** Min 800 g for 8 wire leads

**Retention:** 50 N (11 lbf) for 60 ± 5 s

**Mating Cycle Life:** Min 750 cycles

#### FOOTPRINT

Standard keystone footprint

#### MOUNTING DIMENSIONS:

1.18" D x 0.67" W x 0.76" H (30.0 mm x 16.9 mm x 19.3 mm)

#### ENVIRONMENTAL CONDITIONS

**Operating Temperature:** 14 °F to 140 °F (-10 °C to 60 °C)

**Storage Temperature:** -40 °F to 158 °F (-40 °C to 70 °C)

**Operating RH:** 93% Max (non-condensing)

#### COMPLIANCE

ANSI/TIA-568-C.2, IEC 60603-7, FCC Part 68 Subpart F, UL 94V-0

#### APPLICATIONS

X.21, V.11, S0, ISDN, CSMA/CD 10BASE-T, 100BASE-TX, 100BASE-T4, 100BASE-T2, 1000BASE-T, 10GBASE-T, TR 4/16/100, 100BASE-VG, ATM LAN 25/51/155, TP-PMD

#### WARRANTY

5 - Year Limited Component

Figure 1: Wiring Schemes

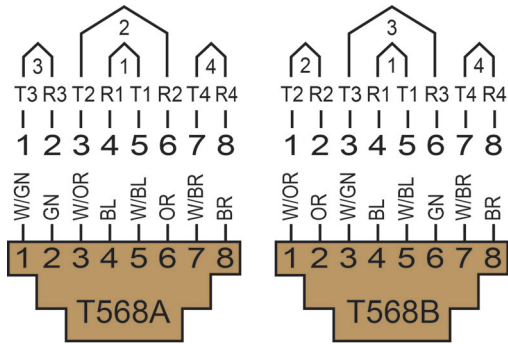


Figure 2: Current Rating

