

SIG-SKF-B-EA

BLANK SINGLE-GANG FACEPLATE, LIGHT IVORY



KEYSTONE PLASTIC FACEPLATES

Signamax Connectivity Systems offers one of the broadest selections of field-configurable, flush-mount faceplates and multimedia surface-mount boxes. From single-gang faceplates to multimedia surface-mount multi-port boxes, Signamax has the solutions to fit your needs.

FEATURES

- Single-gang faceplates are available in 1-, 2-, 3-, 4-, or 6-port versions and allow for mounting any combination of keystone jacks and multimedia modules.
- High-impact thermoplastic, UL94V-0 fire-retardant
- W: 70 mm (2.75 in), H: 114 mm (4.5 in), screw spacing: 83 mm (3.28 in)

CONSTRUCTION

- High impact thermoplastic, UL94V-0 fire retardant

OVERALL DIMENSIONS

- W: 69.9 mm (2.75 in) H: 114.3 mm (4.50 in)

MOUNTING DIMENSIONS


- Mounting screw holes distance – 83.3 mm (3.28 in)

KEYSTONE MODULE MOUNTING DIMENSIONS

- Standard keystone footprint
- Panel opening: W:14.7 mm (0.579 in) H:19.30 mm (0.760 in)

OPERATING TEMPERATURE

- -10 °C to +60 °C (-14 °F to 140 °F)

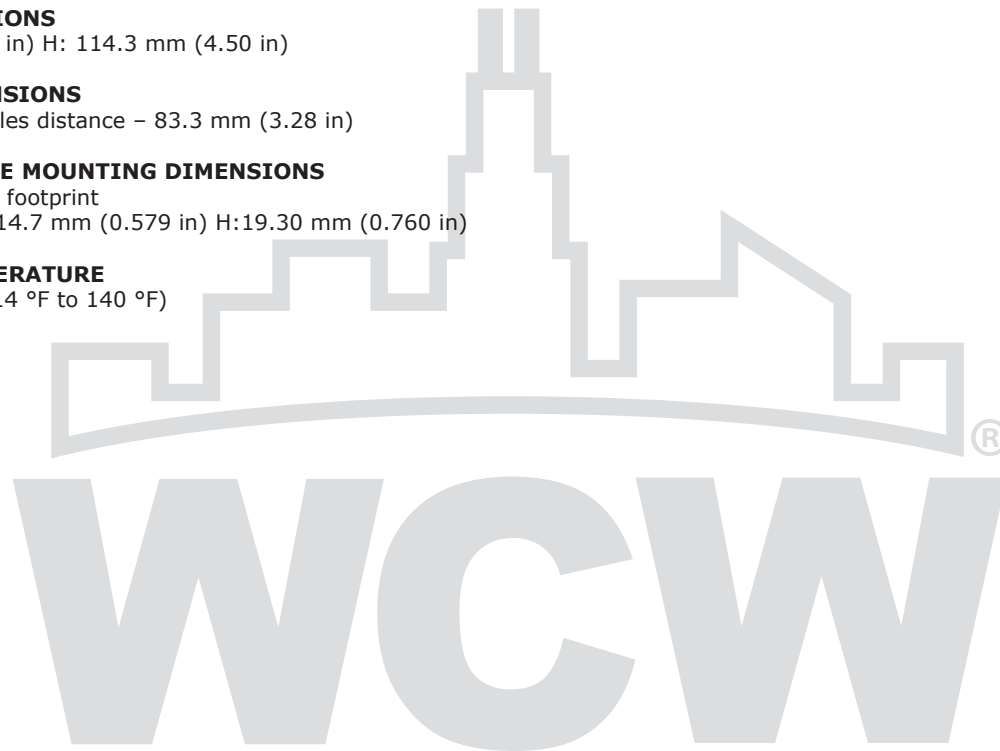

PROVIDED BY OUR VALUED PARTNER • **SIGNAMAX**[™]
CONNECTIVITY SYSTEMS

All specifications referenced are nominal measurements unless otherwise noted.